

MINI MONITOR | DATA SHEET

Model # **SPOT-01N**



The SPOT-01N Mini Monitor is an extremely compact 4" passive loudspeaker. Front and side fill, over and under balconies, and spot monitoring — this 16-ohm speaker provides coverage where you need it.

NOTE: Products pictured are for illustrative purposes and may not exactly represent the product you have purchased.

SCAN ME
for MORE INFO



Failure to observe proper use of this product could result in voiding your warranty.

© 2019 Point Source Audio. All rights reserved. The Point Source Audio logo is a registered trademark of Point Source Audio.




Register Your Warranty:

POINT-SOURCEAUDIO.COM/SUPPORT

MINI MONITOR | DATA SHEET

EQUALIZING LOUDSPEAKER RECOMMENDATIONS

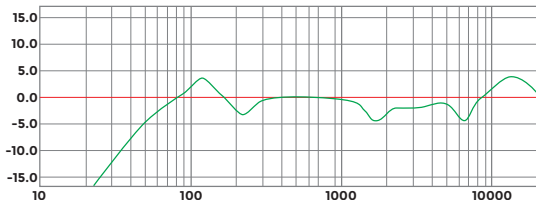

HP, 2nd Order Butterworth, 60Hz
BP, 120Hz, +4dB, BW - 0.60 Octave
BP, 220Hz, -3.5dB, BW - 0.55 Octave
BP, 1.7kHz, -4dB, BW - 0.60 Octave
BP, 3.0kHz, -1.5dB, BW - 1.0 Octave
BP, 6.6kHz, -5dB, BW - 0.50 Octave
BP, 14kHz, +4dB, BW - 0.80 Octave

CONFIGURATIONS



With Bracket



Without Bracket

SPECIFICATIONS

Transducer: One 4" Cone Driver

Impedance: 16 Ohms

Power Handling: 100w RMS, per EIA RS-426-A

Sensitivity: 1w/1m 86 dB, Measured with
Pink Noise in Half Space

Frequency Response: 145 Hz to 11k Hz ± 3 dB,
-10 at 105 Hz

Max Continuous SPL: 106 dB

Max Peak SPL: 112 dB

Dynamic Range: 100 dB

Phase Response: 200 Hz to 12 kHz $\pm 45^\circ$

Coverage: 90° Horizontal and Vertical

Weight: 3.6 lbs (1.6 kg)

Dimensions: 4.75"D x 4.25"W x 4.25"H
(120mm x 108mm x 108mm)

Mounting Bracket: Sold separately